


●特点

- I 由ZC型不锈钢电阻片组合而成，具有耐腐蚀性、无感、阻值稳定和使用寿命长等特点
- II 使用温度范围：-55℃~+315℃
- III 额定功率：5KW~5.6KW
- IV 阻值允许偏差：±10%


●应用

适用于交流电压不超过1140V，直流电压不超过1500V的电力设备电路。主要用于电梯、起重机、港机、轧机、卷扬机、发电机、变频器等的起动、制动、调速和负载等

●外形及安装尺寸

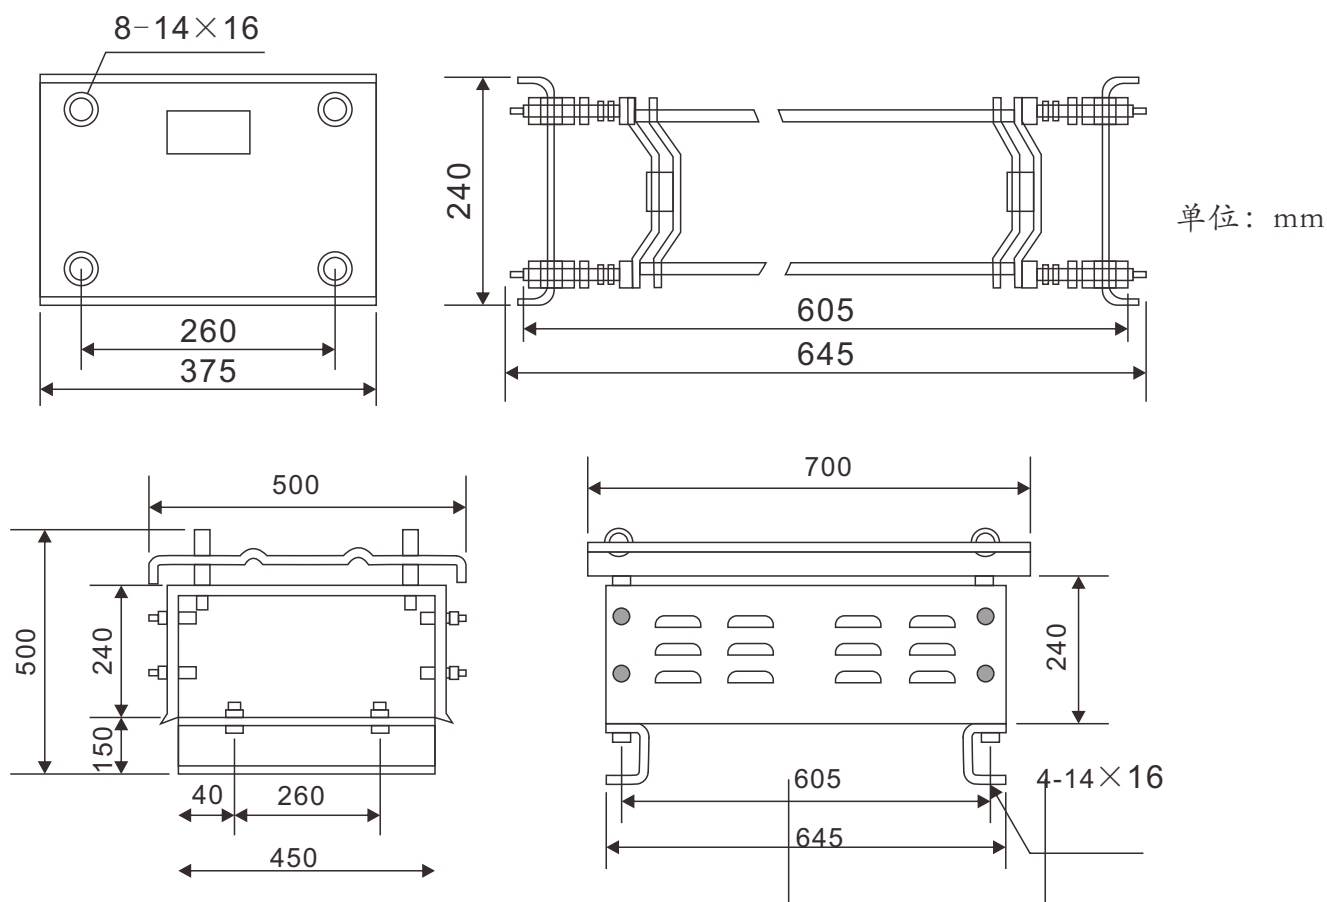

●接线原理图

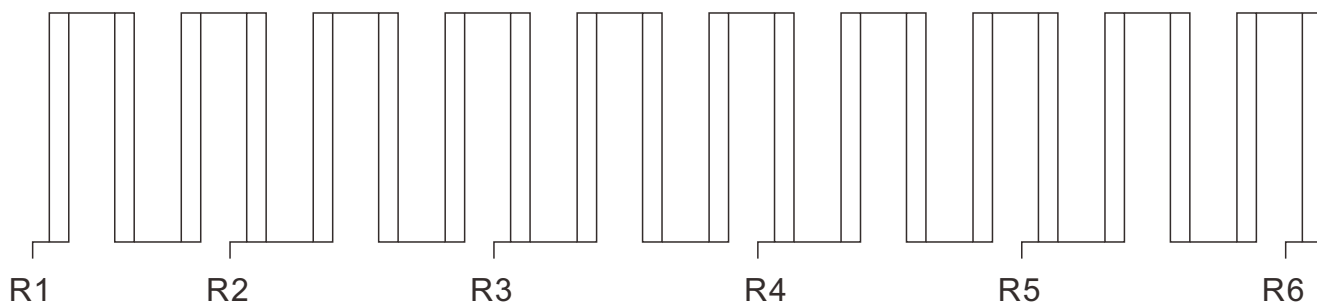

● 型号 阻值与额定电流

序号	型号	额定 工作电流 (A)	发热时间 常数 (A)	总阻值 (Ω)	阻值(Ω)					电阻元件	
					分级阻值					型号	数量
					1	2	3	4	5		
1	ZX28-0.1	237	300	0.1	0.02	0.02	0.02	0.02	0.02	ZC-1-1	20
2	ZX28-0.14	200	215	0.14	0.028	0.028	0.028	0.028	0.028	ZC-1-2	20
3	ZX28-0.2	167	225	0.2	0.04	0.04	0.04	0.04	0.04	ZC-1-3	20
4	ZX28-0.28	141	235	0.28	0.056	0.056	0.056	0.056	0.056	ZC-1-4	20
5	ZX28-0.4	118	246	0.4	0.08	0.08	0.08	0.08	0.08	ZC-1-5	20
6	ZX28-0.56	100	205	0.56	0.112	0.112	0.112	0.112	0.112	ZC-1-6	20
7	ZX28-0.8	84	233	0.8	0.16	0.16	0.16	0.16	0.16	ZC-1-7	20
8	ZX28-1.1	71	197	1.1	0.22	0.22	0.22	0.22	0.22	ZC-1-8	20
9	ZX28-1.6	59	166	1.6	0.32	0.32	0.32	0.32	0.32	ZC-1-9	20
10	ZX28-2.2	50	202	2.2	0.44	0.44	0.44	0.44	0.44	ZC-2-1	20
11	ZX28-3	43	200	3	0.6	0.6	0.6	0.6	0.6	ZC-2-2	20
12	ZX28-4.2	37	185	4.2	0.84	0.84	0.84	0.84	0.84	ZC-2-3	20
13	ZX28-5.6	32	175	5.6	1.12	1.12	1.12	1.12	1.12	ZC-2-4	20
14	ZX28-8	27	179	8	1.6	1.6	1.6	1.6	1.6	ZC-2-5	20
15	ZX28-11	23	110	11	2.2	2.2	2.2	2.2	2.2	ZC-2-6	20
16	ZX28-16	19	90	16	3.2	3.2	3.2	3.2	3.2	ZC-2-7	20
17	ZX28-2	53	175	2	0.4	0.4	0.4	0.4	0.4	ZC-3-1	20
18	ZX28-2.5	47	155	2.5	0.5	0.5	0.5	0.5	0.5	ZC-3-2	20
19	ZX28-3.3	41	134	3.3	0.66	0.66	0.66	0.66	0.66	ZC-3-3	20
20	ZX28-4	37	120	4	0.8	0.8	0.8	0.8	0.8	ZC-3-4	20
21	ZX28-5	34	95	5	1	1	1	1	1	ZC-3-5	20
22	ZX28-6.6	29	85	6.6	1.32	1.32	1.32	1.32	1.32	ZC-3-6	20
23	ZX28-7	28	160	7	1.4	1.4	1.4	1.4	1.4	ZC-3-7	20
24	ZX28-9	25	120	9	1.8	1.8	1.8	1.8	1.8	ZC-3-8	20
25	ZX28-11	23	105	11	2.2	2.2	2.2	2.2	2.2	ZC-3-9	20
26	ZX28-14.5	20	82	14.5	2.9	2.9	2.9	2.9	2.9	ZC-3-10	20
27	ZX28-19.5	17	90	19.5	3.9	3.9	3.9	3.9	3.9	ZC-3-11	20
28	ZX28-28	14	152	28	5.6	5.6	5.6	5.6	5.6	ZC-3-12	20
29	ZX28-35	13	118	35	7	7	7	7	7	ZC-3-13	20
30	ZX28-44	11	104	44	8.8	8.8	8.8	8.8	8.8	ZC-3-14	20
31	ZX28-58	9.8	80	58	11.6	11.6	11.6	11.6	11.6	ZC-3-15	20
32	ZX28-80	8.4	119	80	16	16	16	16	16	ZC-3-16	20

● 料号编号

例 example

ZX28	50A	K	0.56
产品名称	电流	精度	阻值(Ω)
ZX28	50A 100A 200A	K=±10%	0.1, 0.14, 0.2 0.28, 0.4, 0.56 44, 58, 80